





HI-LIGHT USA

WWW.HILIGHTUSA.COM

SBPFTD

2 - BOLT FLANGE UNITS
LIGHT DUTY

Set Screw Locking • Narrow Inner Ring • Ductile Iron Housing • Regreasable

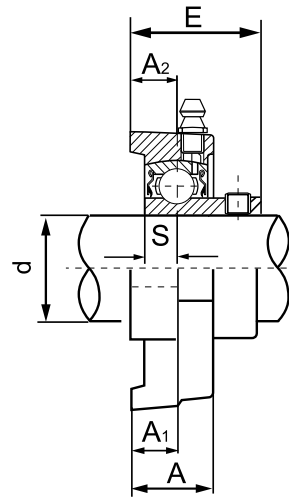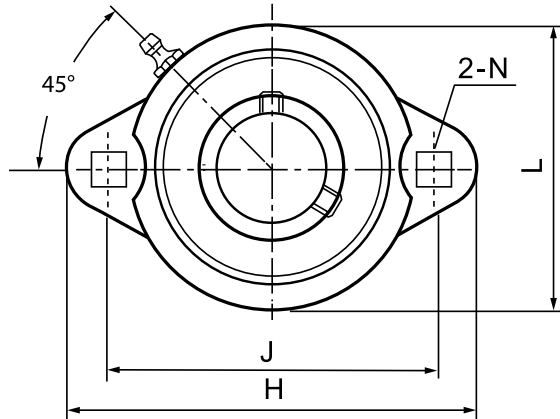

K Type Seal

HLU Unit No.	Shaft Diameter		Dimensions ^(in.) _(mm)									Bolt Used ^(in.) _(mm)	Bearing No.	Housing No.	Weight lbs
	in.	mm	H	J	L	A2	A1	A	N	E	S				
SBPFTD201-08G	1/2												SB201-08G		
SBPFTD202G		15	3.1890	2.5000	2.2047	0.3740	0.3740	0.7087	9/32	1.0039	0.2362	1/4	SB202G	PFTD203	.50
SBPFTD202-10G	5/8		81	63.5	56	9.5	9.5	18	7.1	25.5	6	6	SB202-10G		
SBPFTD203G		17											SB203G		
SBPFTD204-12G	3/4												SB204-12G	PFTD204	.70
SBPFTD204G		20	3.5630	2.8110	2.3740	0.4331	0.4331	0.7795	11/32	1.1417	0.2756	5/16	SB204G		
			90.5	71.4	60.3	11	11	19.8	8.73	29	7	8			
SBPFTD205-14G	7/8												SB205-14G		
SBPFTD205-15G	15/16		3.7520	3.0000	2.6378	0.4882	0.4409	0.8504	11/32	1.2559	0.2953	5/16	SB205-15G	PFTD205	.85
SBPFTD205G		25	95.3	76.2	67	12.4	11.2	21.6	8.73	31.9	7.5	8	SB205G		
SBPFTD205-16G	1												SB205-16G		
SBPFTD206-17G	1 1/16												SB206-17G		
SBPFTD206-18G	1 1/8												SB206-18G	PFTD206	1.20
SBPFTD206G		30	4.4370	3.5630	3.0945	0.5630	0.4724	0.9370	13/32	1.4291	0.3150	3/8	SB206G		
SBPFTD206-19G	1 3/16		112.7	90.5	78.6	14.3	12	23.8	10.3	36.3	8	10	SB206-19G		
SBPFTD206-20G	1 1/4												SB206-20G		
SBPFTD207-20G	1 1/4												SB207-20G		
SBPFTD207-21G	1 5/16												SB207-21G	PFTD207	1.65
SBPFTD207-22G	1 3/8		4.8110	3.9370	3.5039	0.5630	0.5000	1.0630	13/32	1.4882	0.3346	3/8	SB207-22G		
SBPFTD207G		35	122.2	100	89	14.3	12.7	27	10.3	37.8	8.5	10	SB207G		
SBPFTD207-23G	1 7/16												SB207-23G		

Normally supplied as relube with "G" suffix.

Non-relube units available. Please specify non-relube.